

TIGER EQUIPMENT MINI SKID LOADERS



CHEETAH
LOADER
DIVISION



GET THE JOB DONE QUICKLY AND SAFELY WITH THE POWER, MANEUVERABILITY, AND STABILITY OF THE CHEETAH.



ATTACHMENTS INCLUDING TRENCHERS, AUGERS, SWEEPERS, AND MANY MORE!

QUALITY CONSTRUCTION EQUIPMENT

T
I
G
E
R

E
Q
U
I
P
M
E
N
T



TIGER EQUIPMENT MINI SKID LOADERS

CHEETAH SKID STEER LOADERS PACK A POWERFUL PUNCH WHILE MAINTAINING SUPERIOR STABILITY AND OPERATOR VISIBILITY.

What operator wants to be used as ballast? Put the driver in the middle where there is less chance of being thrown off while doing work.

The design of the Cheetah loader transfers much less movement to the operator, giving them a much smoother, more controlled ride. And being up front allows dramatically improved visibility and control.

With a universal front end and 12 GPM hydraulic circuit standard, it's easy to get the attachment you need for your job.

Simple controls – one stick for movement, and one stick for boom/bucket




High and Low flow hydraulic circuits

Universal front end is compatible with most attachments

Operator stands in the middle of the machine for improved visibility, stability and safety

Standard 24 hp electric start Honda and optional 20 hp Kubota diesel engines provide all the power you need.

Exceptional ground clearance and weight distribution allows for unmatched maneuverability

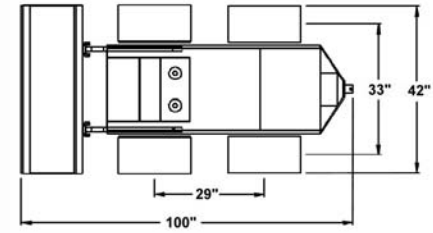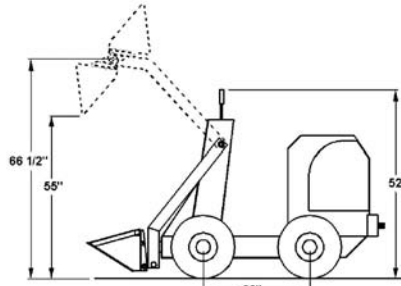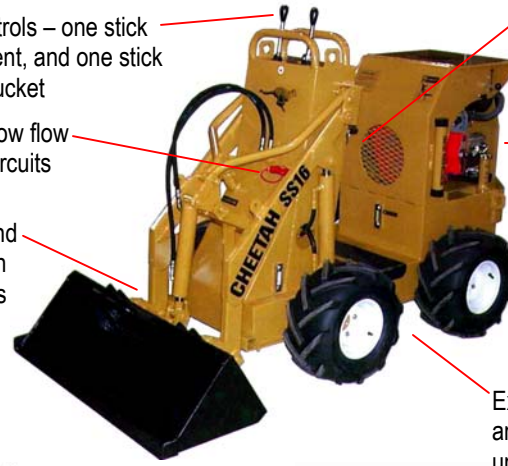

Dimensions shown are for SS16 model. SS20 model is slightly longer.

Model	SS16	SS20D
Operating Weight (lbs)	1250	1450
Operating Capacity (lbs)	525	675
Operating Capacity (lbs) with 150lbs counterweights	600	750
Travel Speed – Max (mph)	8.0	8.0
Ground Clearance (in)	6.0	6.0
Engine	24.0 hp Honda GX690 Gasoline	20.0 hp Kubota D722 Diesel
Fuel Tank (gal)	4.0	4.0
Hydraulics – High Circuit	12 GPM @ 3000 psi	12 GPM @ 3000 psi
Hydraulics – Low Circuit	4 GPM @ 3000 psi	4 GPM @ 3000 psi
Hydraulic Tank (gal)	15.0	15.0
Standard Wheels	18x9.50x8 Superlug	18x9.50x8 Superlug
Optional Wheels	18x6.50x8 Superlug 18x8.50x8 Turfmaster	18x6.50x8 Superlug 18x8.50x8 Turfmaster

Up to two 75lb counterweights may be added to increase both operating and tipping capacities.



Features and specifications subject to change without notice.

Tiger Equipment
15 Byrd Lane
Rocky Mount, VA 24151
Tel: 540-489-7777
888-54-TIGER
Fax: 540-489-7778
email: tigerequip@aol.com
www.tigerequip.com



Distributed by:

T
I
G
E
R

E
Q
U
I
P
M
E
N
T